

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BN10-200X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

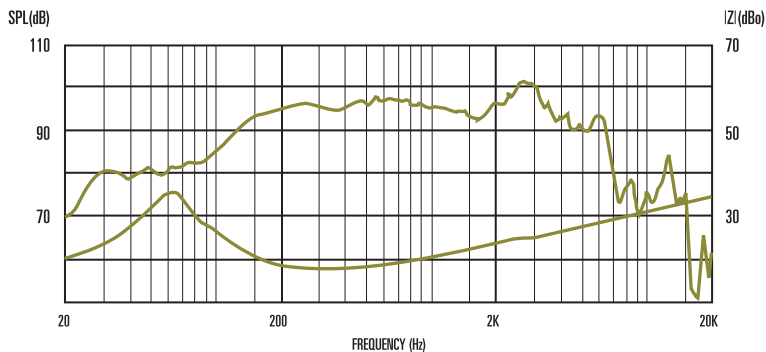

General Parameters

Nominal diameter	254mm/10in
Power Rating (rms)	200W
Nominal impedance	8Ω
Voice coil diameter	50.8mm/2in
Magnet type	Neodymium
Sensitivity	96dB
Frequency range	45-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.21m/8.27in
Fs	65Hz
Mmd	28.9g/1.02oz
Mair	3.64g/0.128oz
Qms	3.57
Qes	0.34
Qts	0.31
Re	5.8Ω
Vas	31.15lt/1.09ft ³
Bl	15.03Tm
Cms	0.18mm/N
Rms	3.73kg/s
Le	0.68mH

Mounting Information

Diameter	256mm/10.1in
Overall depth	112mm/4.4in
Cut-out diameter	229mm/9in
Mounting slot dimensions	6 x 8mm/0.24 x 0.31in
Number of mounting slots	4
Mounting slot PCD	245mm/9.6in
Unit weight	1.5kg/3.3lb